


SNV-6084RP

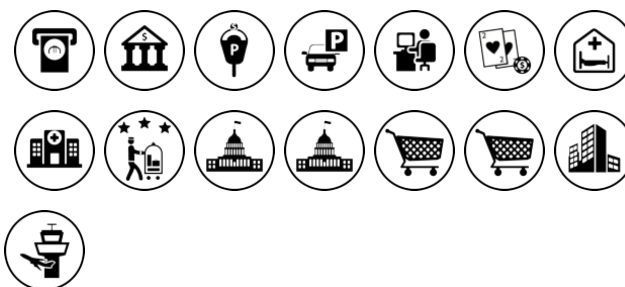

1/2.8 CMOS 2 Megapixel Full HD IP Col/B&W Camera w/ IR LED

- High frame rate of 60 frames per second at Full HD resolution (1080p)
- Embedded analytics: face detection, audio detection, advanced motion, tampering
- Simple focus by motorized varifocal lens
- local video and image storage on SD card
- Advanced video processing: Super light Enhancer (SSLE), extreme backlight WDR, Enhanced DIS stabiliser and Defog
- Multi-Crop Streaming with user management
- Up to 70% less bandwidth utilization, with improved Samsung processing

Summary

The WiseNetIII Camera Series from Samsung Techwin WiseNetIII network ranges which feature the most advanced functions from Samsung with 1.3 to 3 megapixel of high definition images.

These exceptional cameras have the latest technology in terms of low light, extreme back light compensation, easy of use and friendly user interface, as well as powerful image analysis algorithms.

With enhanced features and new technologies which combat the challenges of tough environmental conditions, the WiseNetIII Series will meet the market need which requires professional security.

SNV-6084RP

Technical Specifications

Image Sensor	1/2.8" Progressive Scan Exmor™ 2.38 Megapixel CMOS
Digital Signal Processor (DSP)	WiseNet III
Scanning System	Progressive
Col/B	On/Off/Auto, IR-cut filter removable (ICR)
Protection Rating	IK10, IP66
Max. Framerate H.264	50/60fps @ all resolutions
Max. Framerate MJPEG	30fps@320 x 180 to 800 x 600, 15fps@1024 x 768 to 1920 x 1080
Sensitivity Colour	0.1 Lux @ F1.2 (50IRE)
Sensitivity B/W	0 Lux LED IR on
IR LED	12 pcs.
S/N Ratio	50 dB
Lens	Board-in Type
Lens Drive Type	DC Auto Iris
Lens Focal Length	3.0 ~ 8.5 mm
Horizontal Viewing Angle	106.18°(Wide) ~ 37.1°(Tele)
Minimum Object Distance	0.5 m
Focus Adjustment	Smart focus Motorized
Pan Range	0° ~ 355°
Tilt Range	0° - 67°
Rotate	0° - 355°
Number of Privacy Zones	32
Digital Noise Reduction	On/off 2D/3D Noise Filter (SSNRIII)
Intelligent Video Analytics	Tampering, Virtual line, Enter/Exit, Appear / Disappear, Audio detection, Face detection
High Speed Shutter	Minimum / Maximum / Anti flicker (2-1/12.000sec)
BLC Back Light	On/Off
WDR	>100dB, 100dB
Camera ID	45 character Off/On
White Balance	ATW, Manual, AWC, Indoor, Outdoor
Video Outputs	1x CVBS (1Vpp), BNC
Alarm Inputs	1
Alarm Outputs	1

SNV-6084RP

Technical Specifications

RS-485 Protocols	Samsung-T/E, Pelco-P/D, Sungjin
Client OS	Mac® OS X, Windows® 7, Windows® Vista, Windows® XP
Web Browser	MS Internet Explorer 6.0 (or higher), Firefox, Google Chrome, Safari
Video Management Software	SmartViewer 4.0
Video Compression	H.264 or MPEG4 & MJPEG, Dual Encoding
Audio Compression	G.711 u-law, Bi-Directional
Network Streaming	TCP, UDP (Unicast, Multicast)
Network Interface	1x 10/100 Base T/TX (RJ-45)
Security	HTTPS(SSL) Login Authentication Digest Login Authentication, IP Address Filtering
PoE Specifications	IEEE-802.3af
Alarm Event	File upload via FTP, E-Mail / Notification via E-Mail, TCP / Local storage (SD card) recording at network disconnected /External output
SD memory	Micro SD/SDHC/SDXC Motion images recorded in the SDXC/SDHC/SD memory card can be downloaded
ONVIF compliant	Profile S
Material	Aluminium
Operating Temperature	-30°C ~ +55°C
Humidity	less than 90%, non condensing
Supply Voltage	12 Vdc, 24 Vac, PoE (IEEE 802.3af)
Power Consumption (W)	13.5
Weight	0.950 kg - 2.09 lbs

Accessories



SBV-158G
Junction Box for Samsung
SNV-Series
5084,6084,7084,5084R,6084R,7084R

SNV-6084RP

Dimensions

Dimensions

Unit : mm (inch)

